

DESCRIPTION

CATALOG: E-725-U-180-R1	BALLAST TYPE: Electronic	STARTING METHOD: Programmed Rapid Start	NUMBER OF LAMPS - LAMP TYPE: 1 F80W T5
-----------------------------------	------------------------------------	---	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 – 277 V~ +/- 10%	LAMP WATTS: 80 W	INPUT WATTS: 80 to 95 W	INPUT CURRENT: 0,690 – 0,300 A	OCV: 900 V~ Min	PF: > 0,98	FREQUENCY: 50 / 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 90%	BEF: 1,1	LAMP CONNECTION: Serie	THD (1): < 15 %	NO PCB'S

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES TOL(+/-)	N/A	16,0625 0,0125	16,375 0,0125	1,1875 0,0125	16,5 0,0125	1,125 0,0125
	MM TOL(+/-)	N/A	407,9 0,31	415,9 0,31	30,2 0,31	419,1 0,31	28,6 0,31
	LEAD LENGTH						
	UNITS	BLACK	WHITE	RED	BLUE	BLUE	
INCHES TOL(+/-)	N/A	N/A	N/A	N/A	N/A		
MM TOL(+/-)	N/A	N/A	N/A	N/A	N/A		

CARTON CHARACTERISTICS

UNITS/CARTON 10	CARTONS/LAYER 14	# OF LAYERS 10	UNITS/PALLET 1400	PIECE WEIGHT 0,57 Kg.	CARTON WEIGHT 5,9 Kg.	PALLET WEIGHT 848 Kg.
CARTONS/PALLET 140	CARTON DIMENSIONS 44,5 x 17,3 x 7,5 cm.		PALLET DIMENSIONS 8,8 x 121,1 x 75,1 cm.		PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET 101,6 x 121,9 x 76,2 cm.	

MISC.

--

CARTON LABEL

ISB SOLA BASIC

CAT. E-725-U-180-R1 FOR: 1 LAMP F80T5

VOLTAGE 120/277 0,690/0,300 A

50/60 Hz UNIT 10


PROGRAMMED RAPID START ELECTRONIC BALLAST

ISO 9001:2000

UL LISTED 5P 49 CSA QMI MADE IN MEXICO

851-08348E

ELECTRICAL DIAGRAM

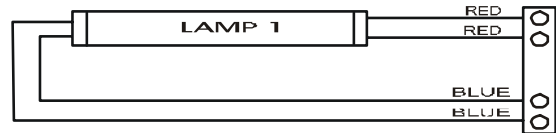

PRODUCT LABEL

SOLA

PROGRAMMED RAPID START ELECTRONIC BALLAST

E-725-U-180-R1

CLASS P INHERENT THERMAL PROTECTION TYPE 1 OUTDOOR

5 YEAR WARRANTY SOUND RATED: A

NO PCB'S MINIMUM STARTING TEMPERATURE: -15°C (5°F) EOL PROTECTION

GROUND BALLAST CASE MOUNT LAMP WITHIN 1/4" OF GROUNDING METAL REELECTOR PARTIAL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES

CAUTION: HAZARDOUS VOLTAGE! DO NOT CONNECT LINE VOLTAGE TO THESE TERMINALS OR INSTALLATIONS. LAMP/PLUG RATINGS: 120 V-800 V

USE 18 AWG SOLID COPPER WIRE 600V RATED ONLY, STRIPPED TO 0,33"

UL LISTED 5 P 49

CSA EEV106469

ISO 9001:2000

QMI REGISTERED

Lighting and Power Source
 2840 Keller Springs Road,
 Suite 1102 & 1103
 Carrollton, TX 75006 – 4832
 Tel : (888) 385-4448
 Fax : (972) 418-5858

Made in Mexico by Industrias Sola Basic S.A. de C.V.