

DESCRIPTION


CATALOG: E-750-U-260	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS – LAMP TYPE: 1 - F96T12, 2 - F96T12
--------------------------------	------------------------------------	--	---

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 - 277 V~ ±10%	LAMP WATTS: 60/75 w	INPUT WATTS: 134 w	INPUT CURRENT: 1.12/0.5 A	OCV: 660 v	PF: > 0.97	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.86	BEF: 0.64	LAMP CONNECTION: PARALLEL	THD (1): < 19%	NO PCB'S

(1) FOR 2-F96T12

PHYSICAL CHARACTERISTICS

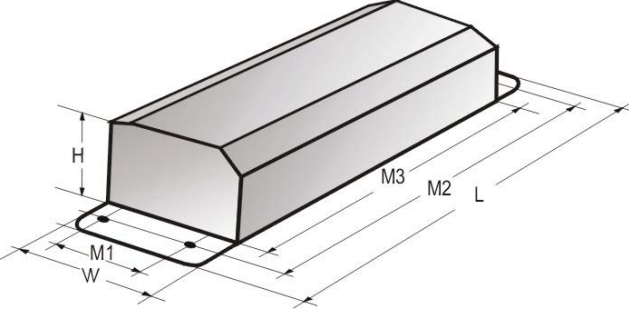	CASE DIMENSIONS							
	UNITS	M1	M2	M3	W	L	H	
	INCHES	2.0	11.14	10.5	3.11	11.75	1.78	
	TOL(+/-)	0.01	0.03	0.01	0.05	0.10	0.08	
	MM	51	283	267	79	298	45	
	TOL(+/-)	0.25	0.8	0.25	1.30	2.50	2.00	
LEAD LENGTH								
UNITS	BLACK	WHITE	RED	BLUE	BLUE			
INCHES	22	22	57	47	47			
TOL(+/-)	3/8	3/8	3/8	3/8	3/8			
MM	559	559	1448	1194	1194			
TOL(+/-)	10	10	10	10	10			

CARTON CHARACTERISTICS

UNITS/CARTON 6	CARTONS/LAYER 12	# OF LAYERS 8	UNITS/PALLET 576	PIECE WEIGHT 3.74 lbs	CARTON WEIGHT 23 lbs	PALLET WEIGHT 2,285 lbs
CARTONS/PALLET 96	CARTON DIMENSIONS 12" x 12" x 4"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 40"	


MISC.

--

CARTON LABEL



ELECTRICAL DIAGRAM

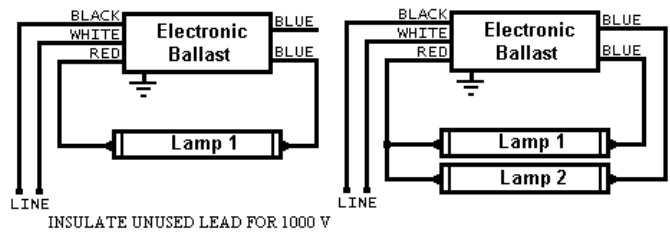

PRODUCT LABEL




ISO 9001:2000



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.

ISB LIGHTING & POWER SOURCE
2840 KELLER SPRINGS ROAD,
SUITES 1102 AND 1103
CARROLLTON, TX. 75006
U.S.A.
Tel. 972-416-4500
Fax. 972-418-5858