


CORE AND COIL

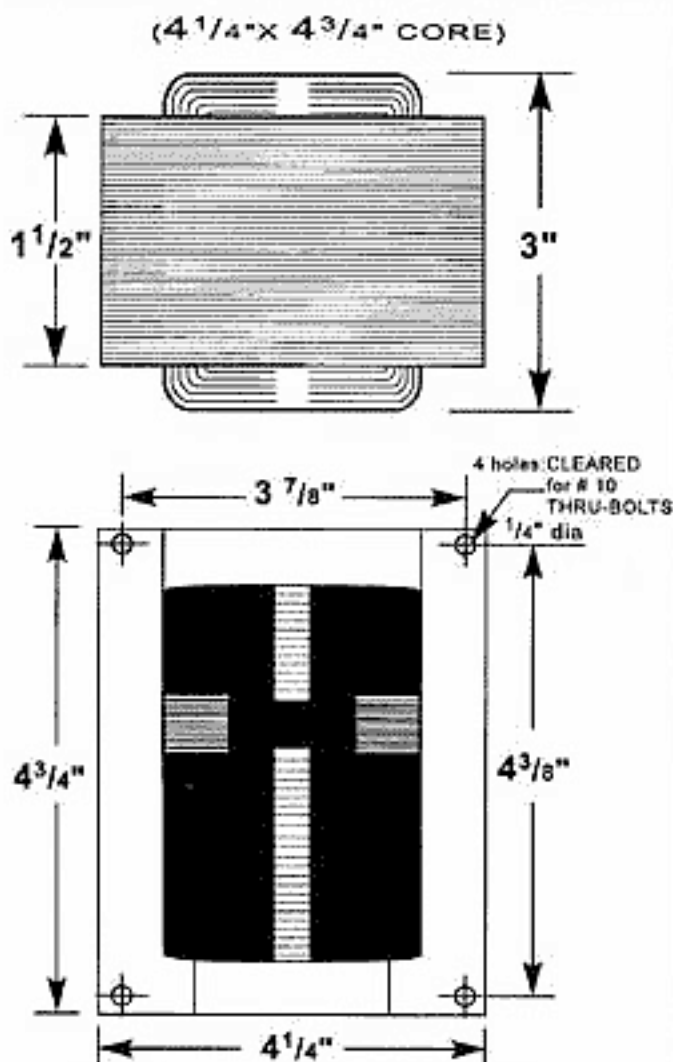

SOLA ballast leads wires are properly identified indicating on their surfaces the input voltages. ALL LEAD LENGTHS: 12 INCHES


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE RANGE	
POWER FACTOR	HIGH
	±10%
MIN. STARTING TEMP.	-20°C

TECHNICAL SPECIFICATION SHEET

250 WATT, MH M58 CWA
BALLAST E-871-XX-251 60Hz.


BRACKET
CORE & COIL
MOUNTING BRACKET

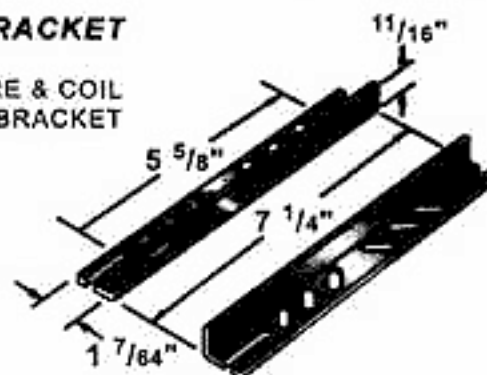

KB47
Mounting bracket for
Core & Coil Ballasts
(2 brackets with thru bolts)

CAPACITOR
RATING 15 MFD±3%
400 VAC, MIN

Dry Film Capacitors
Thermal Plastic Case

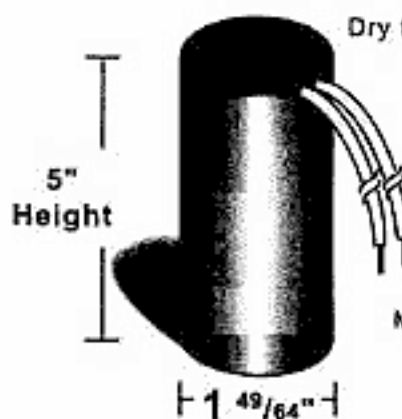


Dry film capacitor contains
no oil; are furnished
with 12\" leads and
includes discharge
resistor


Max. case temp. 110°C

C-01

MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballasts)

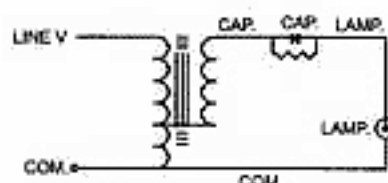

SINGLE VOLTAGE

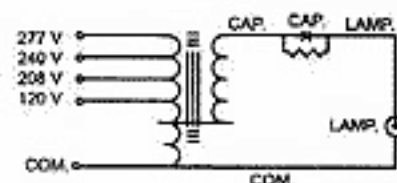

MULTI VOLTAGE
120/208/240/277 VOLT CONNECTION

Line Voltage	Catalog Number	Circuit Type	Input Watts	Line Current (AMPS)			Ballast Net Weight (lbs)	UL Bench Top Rise Code 1029
				Operating	Open Circuit	Starting		
208	E-871-R-251	CWA	292	1.45	1.7	0.83	300	A
277	E-871-T-251	CWA	292	1.1	1.28	0.60	300	A
120 or 208 or 240 or 277	E-871-W-251	CWA	292	2.5	2.6	1.51	300	A

ORDERING INFORMATION

***Add proper suffix to catalog number when ordering as indicated below:

No suffix= Core and Coil Only

B= Core and Coil, and Bracket

C= Core and Coil, and Capacitor

BC= Core and Coil, Capacitor and Bracket

File No. E182278

ISB SOLA BASIC BALLASTS

Lighting Source, Inc.
6064 Jerome Trail
Dallas, TX 75252
Tel: (888) 385-4448 (972) 248-4748
Fax: (972) 248-4748
E-mail: lighting@airmail.net
Website: www.ballastsource.com