


CORE AND COIL

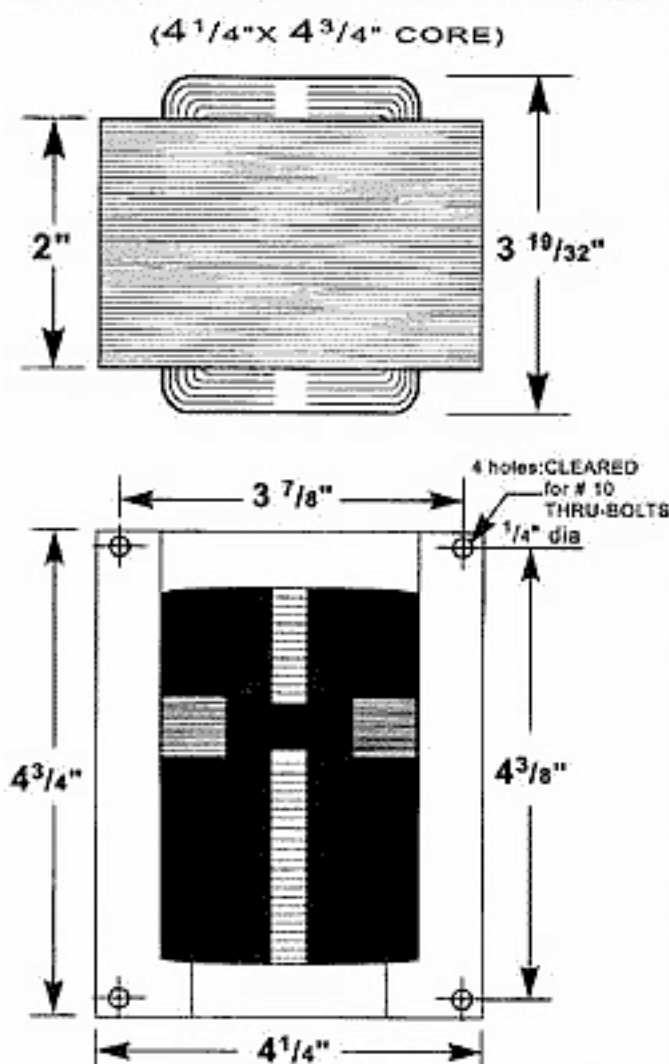

SOLA ballast leads wires are properly identified indicating on their surfaces the input voltages. ALL LEAD LENGTHS: 12 INCHES

ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE	
POWER FACTOR	HIGH
	±10%
MIN. STARTING TEMP.	-20°C

TECHNICAL SPECIFICATION SHEET

400 WATT, MH M59 CWA
BALLAST E-871-XX-411 60Hz.

BRACKET

CORE & COIL
MOUNTING BRACKET

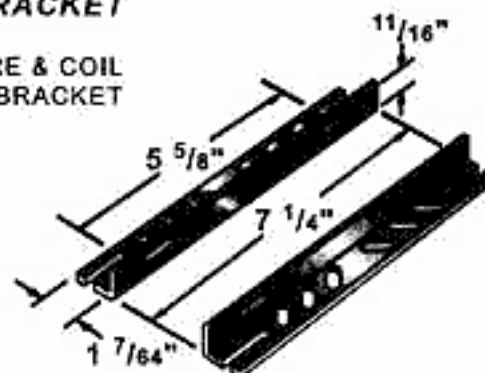


KB47
Mounting bracket for
Core & Coil Ballasts
(2 brackets with thru bolt)

CAPACITOR

RATING 24 MFD±3%
360 VAC, MIN

Dry Film Capacitors
Thermal Plastic Case

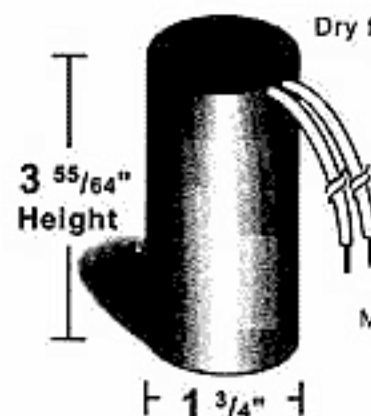


Dry film capacitor contains
no oil; are furnished
with 12\"/>


Max. case temp. 110°C

C-01

MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballasts)

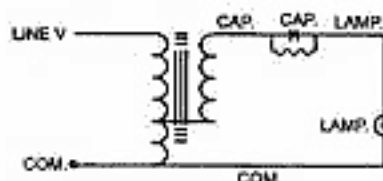

SINGLE VOLTAGE

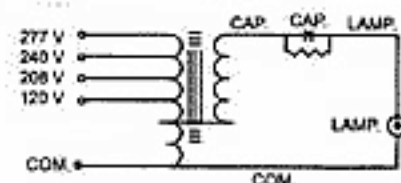

MULTI VOLTAGE
120/208/240/277 VOLT CONNECTION

Line Voltage	Catalog Number	Type	Line Current (AMPS)					Open Circuit Voltage	Drop Out Voltage	Fuse	Ballast Net Weight (lbs)	UL Bench Top Rise Code 1029
			Input Watts	Operating	Open Circuit	Starting						
	E-871-F-411	CWA	458	4.1	4.1	2.31	300	55	10	12.7		
208	E-871-R-411	CWA	458	2.35	2.5	1.3	300	85	8	12.7	C	
208	E-871-M-411	CWA	458	2.05	2.1	1.1	300	95	5	12.7	C	
277	E-871-T-411	CWA	458	1.77	1.9	0.94	300	110	5	12.7	C	
	E-871-DL-411	CWA	458	1.0	1.02	0.95	300	200	5	12.7		
120 or	E-871-W-411	CWA	458	4.1	4.1	2.31	300	55	10	12.7	C	
208 or		CWA	458	2.35	2.5	1.3	300	85	8	12.7		
240 or		CWA	458	2.05	2.1	1.1	300	95	5	12.7		
277		CWA	458	1.77	1.9	0.94	300	110	5	12.7		

ORDERING INFORMATION

***Add proper suffix to catalog number when ordering as indicated below:

No suffix= Core and Coil Only

B= Core and Coil, and Bracket

C= Core and Coil, and Capacitor

BC= Core and Coil, Capacitor and Bracket

File No. E182278



ISB SOLA BASIC
BALLASTS

Lighting Source, Inc.
6064 Jerome Trail
Dallas, TX 75252
Tel: (888) 385-4448 (972) 248-
Fax: (972) 248-4748
E-mail: lighting@airmail.net
Website: www.ballastsource.com