


CORE AND COIL

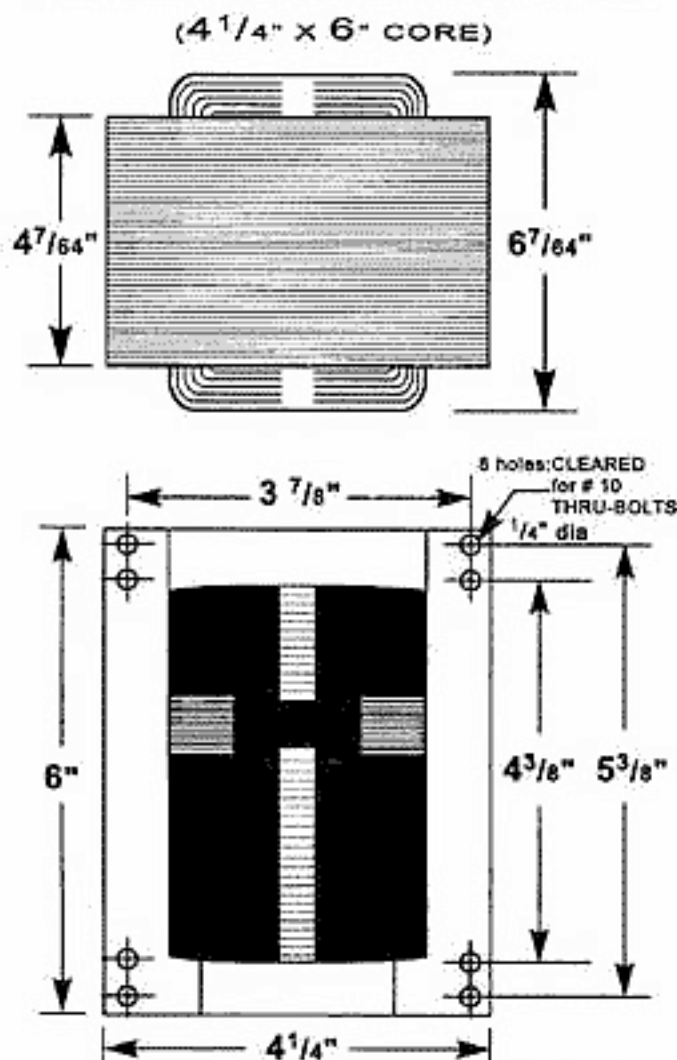

SOLA ballast leads wires are properly identified indicating on their surfaces the input voltages. ALL LEAD LENGTHS: 12 INCHES

ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE
POWER FACTOR HIGH
MIN. STARTING TEMP. $\pm 10\%$
-20°C

TECHNICAL SPECIFICATION SHEET

1500 WATT, MH M48 CWA
BALLAST E-MCAXXX1500 60Hz.

BRACKET

CORE & COIL
MOUNTING BRACKET

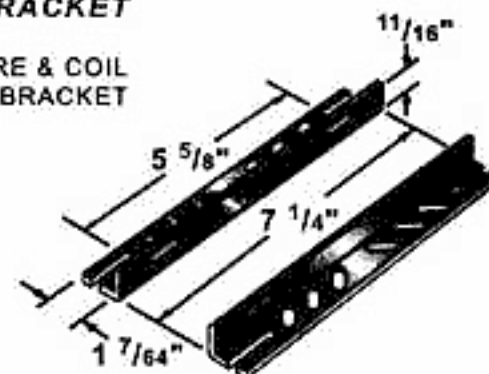


KB47
Mounting bracket for
Core & Coil Ballasts
(2 brackets with thru bolts)

CAPACITOR

RATING 32 MFD $\pm 3\%$
525 VAC, MIN

Dry Film Capacitors
Thermal Plastic Case

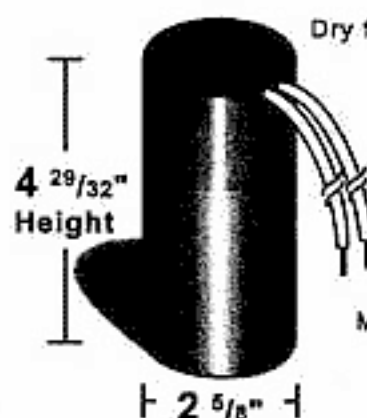


Dry film capacitor contains
no oil; are furnished
with 12" leads and
includes discharge
resistor


Max. case temp. 110°C

C-01

MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballasts)

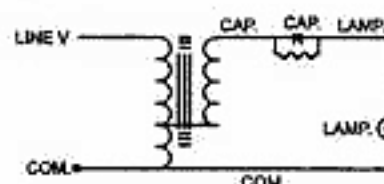

SINGLE VOLTAGE

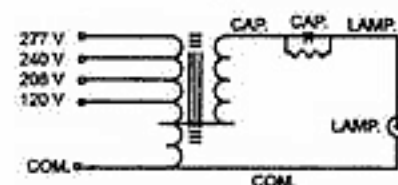

MULTI VOLTAGE
120/208/240/277 VOLT CONNECTION

Line Current (AMPS)											
Line Voltage	Catalog Number	Circuit Type	Input Watts	Operating	Open Circuit	Starting	Open Circuit Voltage	Drop Voltage	Fuse	Ballast Net Weight (lbs)	UL Bench Top Rise Code 1029
208	E-MCA00R1500	CWA	1605	7.8	5.1	5.2	435	130	25	30	D
277	E-MCA00T1500	CWA	1605	5.85	4.2	3.8	435	175	20	30	E
120 or 208 or 240 or 277	E-MCA00W1500	CWA	1605	13.5	9.11	9.12	435	75	40	30	G
		CWA	1605	7.8	5.1	5.2	435	130	25	30	
		CWA	1605	6.75	4.5	4.6	435	150	20	30	
		CWA	1605	5.85	4.2	3.8	435	175	10	30	

ORDERING INFORMATION

***Add proper suffix to catalog number when ordering as indicated below:

No suffix= Core and Coil Only

B= Core and Coil, and Bracket

C= Core and Coil, and Capacitor

BC= Core and Coil, Capacitor and Bracket

File No. E182278

LR 106489

ISB SOLA BASIC
BALLASTS

Lighting Source, Inc.
6064 Jerome Trail
Dallas, TX 75252
Tel: (888) 385-4448 (972) 248-3.
Fax: (972) 248-4748
E-mail: lighting@airmail.net
Website: www.ballastsource.com

FBAME1500/01-079