

**ISB** SOLA BASIC



REV: "A"

**FLUORESCENT BALLAST SPECIFICATIONS**


**DESCRIPTION**

CATALOG <b>E450-F-260</b>	TYPE Energy efficient magnetic	STARTING METHOD Instant Start	NUMBER OF LAMPS 2	LAMP TYPE F96SST12, F96T12, F72T12
------------------------------	-----------------------------------	----------------------------------	----------------------	---------------------------------------

**ELECTRICAL CHARACTERISTICS**

INPUT VOLTAGE 120v	LAMP WATTS 60/75/55w	INPUT WATTS 160w	INPUT CURRENT 1.39 A	OCV 690v	PF 0.96	FREQUENCY 60 Hz	SOUND RATED B
MIN START TEMP 50°F (60°F/SS lamp)	CLASS P	TYPE 1 outdoor	BALLAST FACTOR 0.93 (0.93 / SS lamp)	BEF 0.581	THD 24%	NO PCB'S	

**PHYSICAL CHARACTERISTICS**

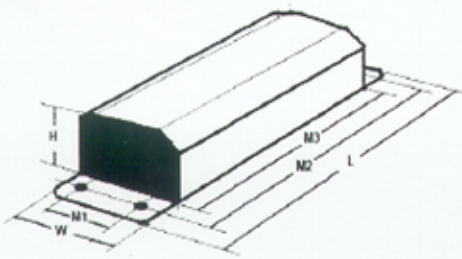

CASE DIMENSIONS						
UNITS	M1	M2	M3	W	L	H
INCHES	2.0	11.140	10.5	3.109	11.750	1.781
TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
MM	51	283	267	79	298	45
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30


LEAD LENGTH						
UNITS	BLACK	WHITE	RED	BLUE	YELLOW	
INCHES	70	70	46	46		
TOL(+/-)	3/8	3/8	3/8	3/8		
MM	1778	1778	1168	1168		
TOL(+/-)	10	10	10	10		

**CARTON CHARACTERISTICS**

UNITS/CARTON 6	CARTONS/LAYER 12	# OF LAYERS 4	UNITS/PALLET 288	PIECE WEIGHT 8 lbs	CARTON WEIGHT 49 lbs	PALLET WEIGHT 2,391 lbs
CARTONS/PALLET 48	CARTON DIMENSIONS 12" x 12" x 4"		PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 24"		

CARTON LABEL

ELECTRICAL DIAGRAM

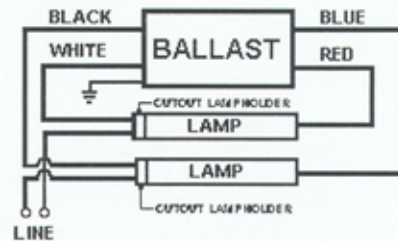

PRODUCT LABEL

**120** VOLT **1.39** AMP **690** OCV **60** HZ

FOR: 2-F96T12/S or 2-F72T12/S  
or at 15.5° C Min amb.: 2-F96T12/S/ES  
< 600 Volts to Ground

SOUND RATED **B**

**3** YEAR WARRANTY

HIGH POWER FACTOR INSTANT START BALLAST

**E450-F-260**

MINIMUM 10° C  
MADE IN MEXICO

TYPE 1  
OUTDOOR  
CLASS P  
NON PCB






Lighting and Power Source  
2707 Realty Road, Suite 110  
Carrollton, TX 75006  
Tel: (888) 385-4448  
Fax: (972) 418-5858