

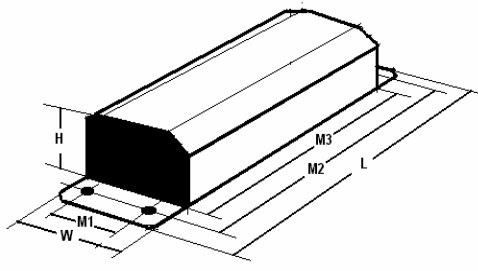
### DESCRIPTION

CATALOG: <b>E620-F-2345088-TP</b>	STARTING METHOD: Rapid Start	INPUT VOLTAGE: 120 V~	OCV: 600 V~	FREQUENCY: 60 Hz
BALLAST TYPE: Magnetic Sign	CLASS: P	TYPE: 2 outdoor	LAMP CONNECTION: Series	SOUND RATED: D NO PCB'S

### ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP FOOTAGE (ft)	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F36T12/HO	2	6	45	-20/-29	112	1.33	0.78	0.696	0.70	42	1.9
F60T12/HO	4	20	75	-20/-29	282	2.41	0.98	0.347	0.97	8	1.6
F72T12/HO	3	18	87	-20/-29	266	2.23	0.92	0.345	0.99	11	1.7

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	2.0	11.140	10.50	3.187	11.750	2.625
TOL(+/-)	0.010	0.010	0.010	0.080	0.050	0.050	
MM	51	283	267	81	298	66	
TOL(+/-)	0.25	0.25	0.25	2.00	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW	BLUE/WH	BROWN
INCHES	24	24	46	75	75	46	46
TOL(+/-)	3/8	3/8	3/8	3/8	3/8	3/8	3/8
MM	610	610	1168	1905	1905	1168	1168
TOL(+/-)	10	10	10	10	10	10	10

### CARTON CHARACTERISTICS

UNITS/CARTON 4	CARTON/LAYER 12 & 4	# OF LAYERS 4 & 1	UNITS PALLET 216	PIECE WEIGHT 11 lbs	CARTON WEIGHT 45 lbs	PALLET WEIGHT 2 489 lbs
CARTON PALLET 54	CARTON DIMENSIONS 12" x 12" x 4"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 28"			

### MISC.

\*Will operate any 2, 3 or 4 T12/HO(800 mA) lamp combinations provided the total lamp length is not less than 6ft. nor more than 20ft.. See product label for further wiring instructions. White Painted Can.

#### CARTON LABEL



#### PRODUCT LABEL

### ELECTRICAL DIAGRAM



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 008281

Made in Mexico by Industrias Sola Basic S.A. de C.V.

**Lighting and Power Source**  
 2840 Keller Springs Road,  
 Suite 1102 & 1103  
 Carrollton, TX 75006 – 4832  
 Tel: (888) 385-4448  
 Fax: (972) 418-5858