

DESCRIPTION

CATALOG: ERSF-234-TP	STARTING METHOD: Rapid Start	INPUT VOLTAGE: 120 V~	OCV: 300 V~	FREQUENCY: 60 Hz
BALLAST TYPE: Normal Power Factor	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: A
NO PCB'S				

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F40T12/ES	2	34	60/16	51	0.61	0.60	1.176	0.70	10	1.5
F40T12	2	40	50/10	43	0.46	0.45	1.046	0.78	15	1.6
F40T12/U/ES	2	34	60/16	52	0.61	0.60	1.153	0.71	12	1.6
F40T12/U	2	40	50/10	45	0.48	0.48	1.066	0.78	17	1.7
F40T10	2	40	50/10	45	0.47	0.50	1.111	0.78	14	1.7

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	6.00	5.440	2.375	6.560	1.500
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
	MM	43	152	138	60	166	38
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
	LEAD LENGTH						
	UNITS	BLACK	WHITE	RED	BLUE	YELLOW	
	INCHES	22	22	26	26	36	
	TOL(+/-)	3/8	3/8	3/8	3/8	3/8	
MM	559	559	600	600	914		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS

UNITS/CARTON 24	CARTON/LAYER 11	# OF LAYERS 3	UNITS PALLET 792	PIECE WEIGHT 2.9 lbs	CARTON WEIGHT 70.5 lbs	PALLET WEIGHT 2 365 lbs
CARTON PALLET 33	CARTON DIMENSIONS 10 1/2" x 14" x 5 3/4"		PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 24 1/2"		

MISC.

--


CARTON LABEL



PRODUCT LABEL



ELECTRICAL DIAGRAM

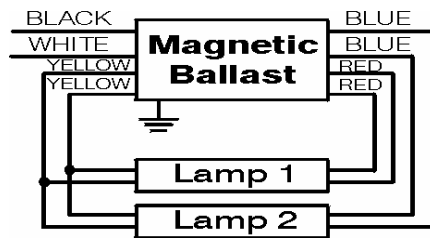

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



Certificate No. 006281

Lighting and Power Source
 2840 Keller Springs Road,
 Suite 1102 & 1103
 Carrollton, TX 75006 – 4832
 Tel: (888) 385-4448
 Fax: (972) 418-5858