

ISB SOLA BASIC



REV. "A"

FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG ERSF-240-TP	TYPE Normal Power Factor	STARTING METHOD Rapid Start	NUMBER OF LAMPS 2	LAMP TYPE F40T12
-------------------------------	-----------------------------	--------------------------------	----------------------	---------------------

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE 120v	LAMP WATTS 40w	INPUT POWER 66w	INPUT CURRENT 0.79 A	OCV 285v	PF NPF	FREQUENCY 60 Hz	SOUND RATED A
MIN START TEMP 50°F / 10°C	CLASS P	TYPE 1 outdoor	BALLAST FACTOR 0.52	BEF 0.7878	THD 20%	NO PCB'S	

PHYSICAL CHARACTERISTICS


	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	6.00	5.440	2.375	6.560	1.500
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
	MM	43	152	138	60	166	38
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	22	22	26	26	36		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	559	559	600	600	914		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS

UNITS/CARTON 16	CARTONS/LAYER 12	# OF LAYERS 4	UNITS/PALLET 768	PIECE WEIGHT 2.9 lbs	CARTON WEIGHT 47 lbs	PALLET WEIGHT 2,292 lbs
CARTONS/PALLET 48	CARTON DIMENSIONS 12" x 12" x 4"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED INCLUDING WOOD PALLET 40" x 48" x 24"			

CARTON LABEL

ELECTRICAL DIAGRAM

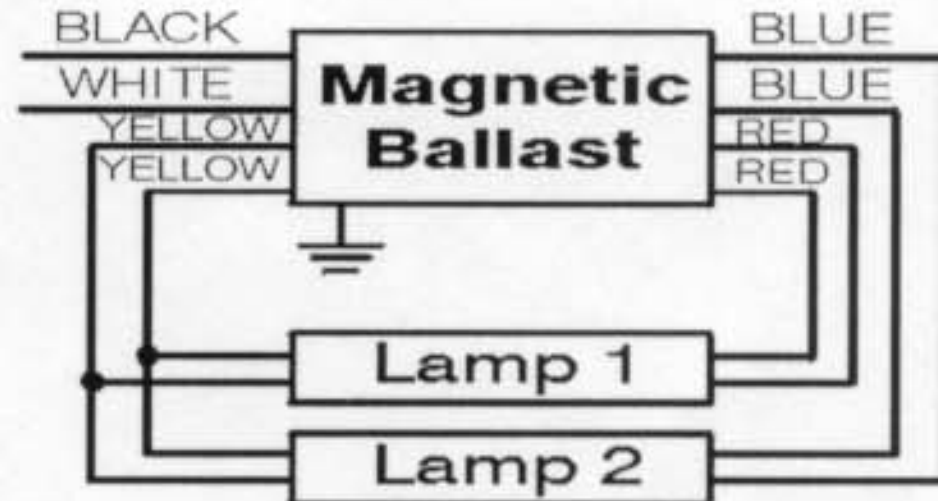

PRODUCT LABEL

SOLA

120 VOLT 0.79 AMP 285 OCV 60 HZ RAPID START BALLAST

FOR 2-F40T12 or 2-FC15T9 **ERSF-240-TP**

SOUND RATED **A** CLASS P TYPE 1 OUTDOOR

2 YEAR WARRANTY

MINIMUM 10°C MADE IN MEXICO

GROUND BALLAST CASE MOUNT LAMPS WITHIN 12" OF GROUNDED METAL REFLECTOR

Lighting and Power Source
 2707 Realty Road, Suite 110
 Carrollton, TX 75006
 Tel: (888) 385-4448
 Fax: (972) 418-5858